

Brief Introduction of ZX20 Series IP Phone System

The all-in-one ZX20 series of IP Phone System can not only provide the basic features of traditional PBX, but also advanced features such as visual voice mail, music on hold ,and auto attendant, etc. With ZYCOO VoIP solutions, SMEs can take advantage of the VoIP services and quickly deploy VoIP networks to connect with multiple branch locations over the Internet without any change on the current equipment or dial plan.




	Model	FXS	FXO
ZX20-A2	A202	0	2
	A211	1	1

Key Features	<p>30 SIP registers</p> <p>Video Calls</p> <p>Multiple Languages</p> <p>DID(Direct Inward Dialing Number)</p> <p>Support SKYPE for SIP</p> <p>Call Monitor / Record</p> <p>Support POE</p> <p>FXO to FXS life line</p>
Basic Features	<p>Codec: G.711-Ulaw,G.711-Alaw,G.726,G.729,GSM,SPEEX H.261,H.263,H.263+,H.264</p> <p>Call Hold / Forward / Transfer / Waiting / Parking</p> <p>Call Paging and Intercom</p> <p>Caller ID</p> <p>Music On Hold</p> <p>DISA(Direct Inward System Access)</p> <p>Flexible Dial Plan</p> <p>Ring Group</p> <p>Conference Room</p> <p>Black List</p> <p>Phone Book</p> <p>Call Queue</p> <p>BLF(Busy Lamp Field)</p> <p>Built-in SIP/IAX2 server</p> <p>Build-in voice mail server</p> <p>Echo Cancelation/VAD</p> <p>Configuration By web</p> <p>Support Static/DHCP/PPPOE</p> <p>VPN Client(Support N2N)</p> <p>DDNS Client(Support Dyndns.org)</p> <p>Support NTP(Network Time Protocol)</p>
Hardware	<p>32 bit embedded RISC DSP</p> <p>256M Onboard Nand Flash</p> <p>64M SDRAM</p>
Package size	L: 246mm × W: 164mm × H: 62mm
Weight	0.7 Kg
Environmental requirements	<p>Temperature: -10°C-45°C</p> <p>Storage temperature: -30°C-65°C</p> <p>Humidity: 10-80% no dew</p> <p>Power: AC100~240V</p>

Applications:

SOHO or Small and medium businesses

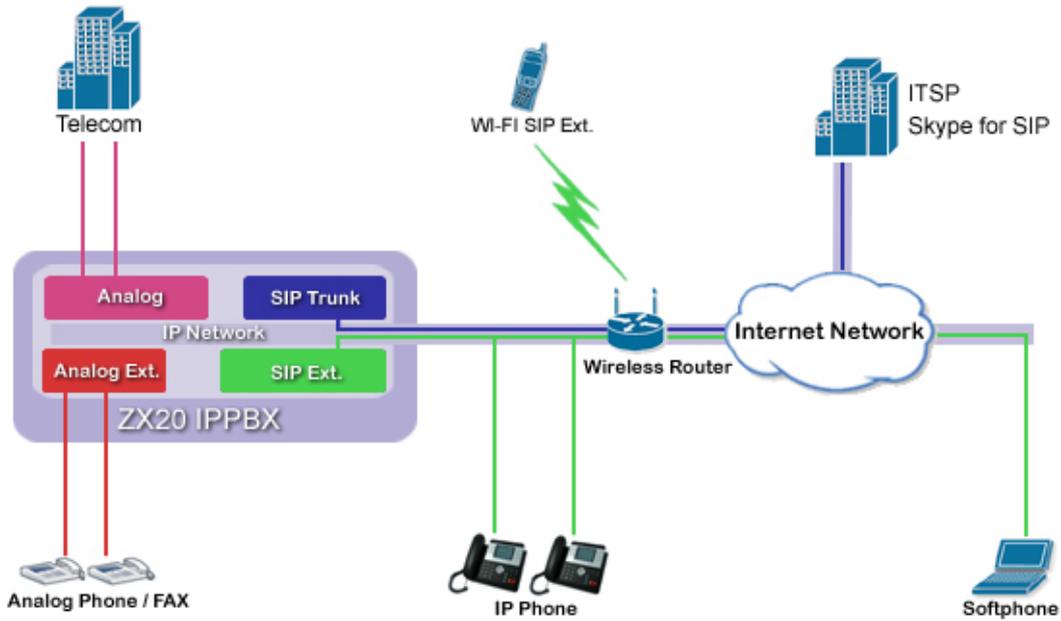

Multiple Site

